

- ▶ Industrial design
- ▶ Width 45mm
- ▶ Voltage monitoring in 3-phase mains
- ▶ 1 change over contact



Technical data

1. Functions

Voltage monitoring in 3-phase mains inside the window between U_{min} and U_{max} with adjustable thresholds and adjustable tripping delay

2. Time ranges

	Adjustment range
Start-up suppression time:	-
Tripping delay:	0.1s 10s

3. Indicators

Yellow LED ON/OFF:	indication of relay output
Red LED ON/OFF:	indication of fault

4. Mechanical design

Self-extinguishing plastic housing, IP rating IP40
 Mounted on DIN-Rail TS 35 according to EN 50022
 Mounting position: any
 Shockproof terminal connection according to VBG 4 (PZ1 required), IP rating IP20
 Initial torque: max. 1Nm
 Terminal capacity:
 1 x 0.5 to 2.5mm² with/without multicore cable end
 1 x 4mm² without multicore cable end
 2 x 0.5 to 1.5mm² with/without multicore cable end
 2 x 2.5mm² flexible without multicore cable end

5. Input circuit

Supply voltage:	12 to 440V AC	terminals A1-A2 (galvanically separated) selectable via transformer modules TR2
Tolerance:	-15% to +10%	
Rated frequency:	48 to 63Hz	
Rated consumption:	2VA (1.5W)	
Duration of operation:	100%	
Reset time:	500ms	
Residual ripple for DC:	-	
Drop-out voltage:	>30% of the supply voltage	

6. Output circuit

1 potential free change over contact
 Switching capacity: 1250VA (5A / 250V AC)
 Fusing: 5A fast acting
 Mechanical life: 20 x 10⁶ operations
 Electrical life: 1 x 10⁵ operations at 1000VA resistive load
 Switching frequency: max. 60/min at 100VA resistive load
 max. 6/min at 1000VA resistive load (according to IEC 947-5-1)
 Insulation voltage: 250V AC (according to IEC 664-1)
 Surge voltage: 4kV, overvoltage category III (according to IEC 664-1)

7. Measuring circuit

Input:	3~ 115/66V	terminals (N)-L1-L2-L3	(TPW115VN4X)
	3~ 230/133V	terminals (N)-L1-L2-L3	(TPW230VN4X)
	3~ 400/230V	terminals (N)-L1-L2-L3	(TPW400VN4X)
Overload capacity:	115/66V	3(N)~ 160/92V	(TPW115VN4X)
	230/133V	3(N)~ 320/184V	(TPW230VN4X)
	400/230V	3(N)~ 600/345V	(TPW400VN4X)
Input resistance:	115/66V	130kΩ	(TPW115VN4X)
	230/133V	270kΩ	(TPW230VN4X)
	400/230V	470kΩ	(TPW400VN4X)
Switching threshold			
U_{max} :		-20% to +30%	
U_{min} :		-30% to +20%	
Asymmetry:		fixed, appr. 10%	


8. Accuracy

Base accuracy:	±5% (of maximum scale value)
Adjustment accuracy:	≤5% (of maximum scale value)
Repeat accuracy:	<1%
Voltage influence:	≤0.02% / 1% supply voltage change
Temperature influence:	≤0.02% / °C

9. Ambient conditions

Ambient temperature:	-25 to +55°C (according to IEC 68-1)
Storage temperature:	-25 to +70°C
Transport temperature:	-25 to +70°C
Relative humidity:	15% to 85% (according to IEC 721-3-3 class 3K3)
Pollution degree:	3 (according to IEC 664-1)

10. Dimensions

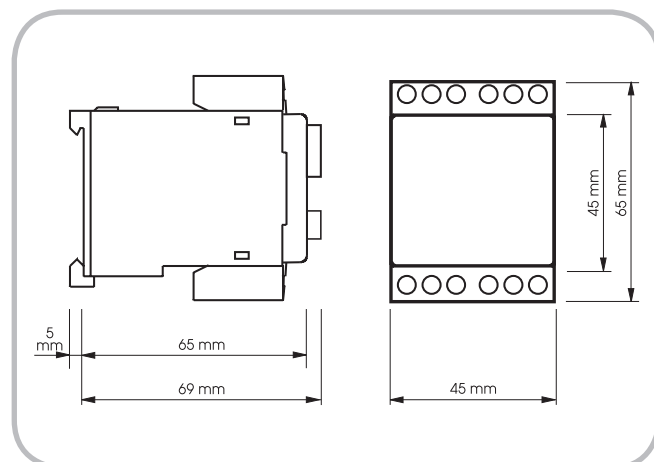


Functions

Voltage monitoring in 3-phase mains inside the window between U_{min} and U_{max} with adjustable thresholds and adjustable tripping delay

Window function

The output relay R switches into on-position (yellow LED illuminated) when the measured voltage exceeds the value adjusted at the U_{min} -regulator (red LED MIN not illuminated). When the measured voltage exceeds the value adjusted at the U_{max} -regulator (red LED MAX illuminated), the set interval of the tripping delay (t_1) begins. After the interval has expired, the output relay switches into off-position (yellow LED not illuminated). The output relay again switches into on-position (yellow LED illuminated) when the measured voltage falls below the value adjusted at the U_{max} -regulator (red LED MAX not illuminated). When the measured voltage falls below the value adjusted at the U_{min} -regulator (red LED MIN illuminated), the set interval of the tripping delay begins again. After the interval has expired, the output relay switches into off-position (yellow LED not illuminated).

When at least one of the phase voltages exceeds the value adjusted at the U_{max} -regulator (red LED MAX illuminated) and at the same time at least one of the phase voltages falls below the value adjusted at the U_{min} -regulator (red LED MIN illuminated), the set interval of the tripping delay (t_1) begins. After the interval has expired, the output relay R switches into off-position (yellow LED not illuminated). The output relay switches into on-position (yellow LED illuminated) as soon as all the phase voltages are back again in the set range (red LEDs not illuminated). Both red LEDs also are illuminated, when the minimum value for the measured voltage was chosen to be greater than the maximum value.

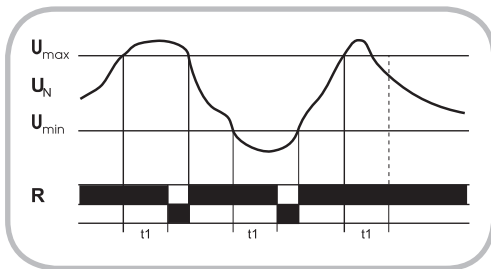

Connections

