


Digital time switches - TSC series

- ▶ DIN-Rail or wall mounting
- ▶ Width 71.5mm
- ▶ 2 channels
- ▶ ON, OFF or impulse function
- ▶ Permanently ON/OFF
- ▶ Manual override
- ▶ Daily, weekly and yearly program
- ▶ Holiday program
- ▶ Unrestricted block-programming
- ▶ Automatic summertime change over
- ▶ Supply voltage independent programming
- ▶ 102 memory locations
- ▶ Sealable front cover
- ▶ Increased interference resistance

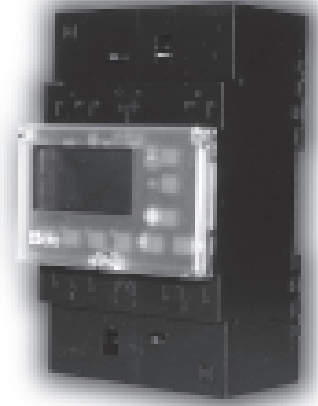

Technical data

1. Functions

Auto	Auto ON/OFF	
I	Impulse	adjustable, 1 to 59s
P	Permanently ON/OFF	
mS	Manual override	

2. Indicators

LC-display

3. Time base

Crystal-controlled	
Power reserve:	>10 years
Crystal accuracy:	±1.5s / day

4. Mechanical design

Self-extinguishing plastic housing, IP rating IP40,
Class of protection II
Mounted on DIN-Rail TS 35 according to EN 50022 or
wall mounting (terminal cover required / included)
Shockproof terminal connection according to VBG 4,
IP rating IP20 (IP40 with terminal cover)
Initial torque: max. 4Nm
Terminal capacity:
1 x 1.5 to 10mm² without multicore cable end
2 x 0.8 to 2.5mm² without multicore cable end
1 x 1.0 to 6mm² flexible with multicore cable end
2 x 0.8 to 2.5mm² flexible with multicore cable end

5. Input circuit

Supply voltage:	230V AC	terminals 4-5
Tolerance:	±10%	
Rated frequency:	50 to 60Hz	
Rated consumption:	230V AC	approx. 2VA


6. Output circuit

2 potential free change over contacts
Switching capacity: 2500VA (10A / 250V AC at $\cos\phi=1$)
Shortest interval: 1min (resp. 1s for impulse)

7. Ambient conditions

Ambient temperature:	-5 to +50°C
Storage temperature:	-5 to +50°C
Transport temperature:	-5 to +50°C
Relative humidity:	<90%


Dimensions

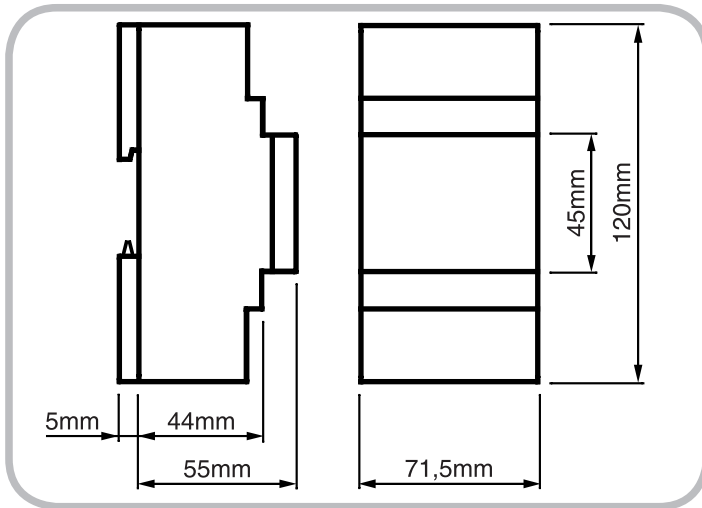

Functions


Auto ON/OFF

The output relay changes its state according to the control signals of the program.

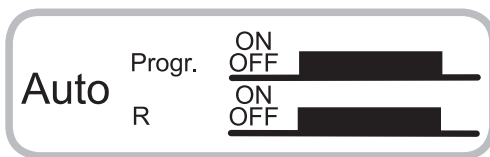


Permanently ON/OFF

The output relay remains in the selected position and is not influenced by the control signals of the program.

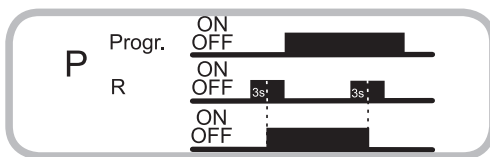


Manual override

This function forces the output relay to switch into the position given for the next program step instantaneously (even before the interval given for the actual program step has expired). The relay remains in this position until the next control signal of the program occurs.

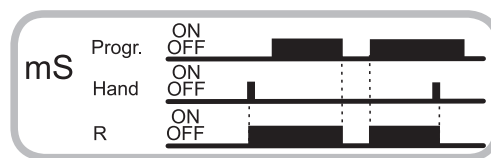

Impulse

If an impulse is set at a given time the output relay switches into on-position for the adjusted time period (1 to 59s).

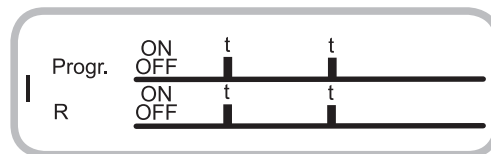

Connections

